

Features & Benefits


- High energy density and small size
- Long stable power with a flat discharge voltage
- Ideal for tooth brush, shaver, camcorder, etc.

Specifications

Rated capacity ⁽¹⁾	Min. 660mAh
Capacity ⁽²⁾	Min. 660mAh Typ. 700mAh
Nominal voltage	3.7V
Charging	CC-CV, Std. 460mA, 4.20V, 3.0 hrs
Weight (max.)	18.5 g
Temperature	Charge: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density ⁽³⁾	Volumetric: 375 Wh/l Gravimetric: 140 Wh/kg


⁽¹⁾ At 20°C ⁽²⁾ At 25°C ⁽³⁾ Energy density based on bare cell dimensions

Dimensions

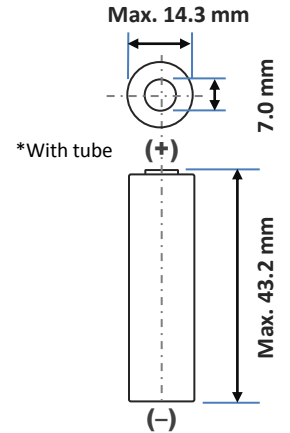


For Reference Only


Charge Characteristics

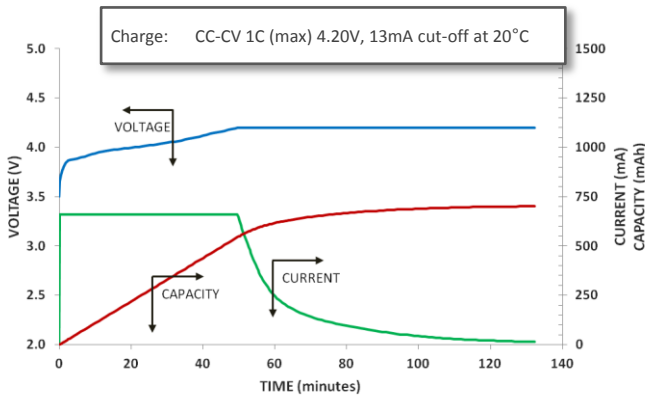


Cycle Life Characteristics

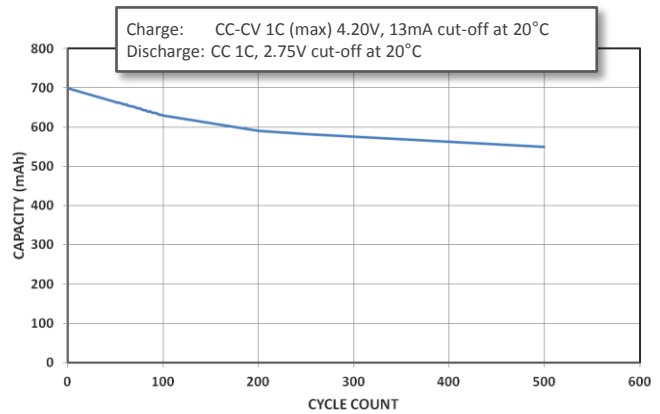

Discharge Characteristics (by temperature)

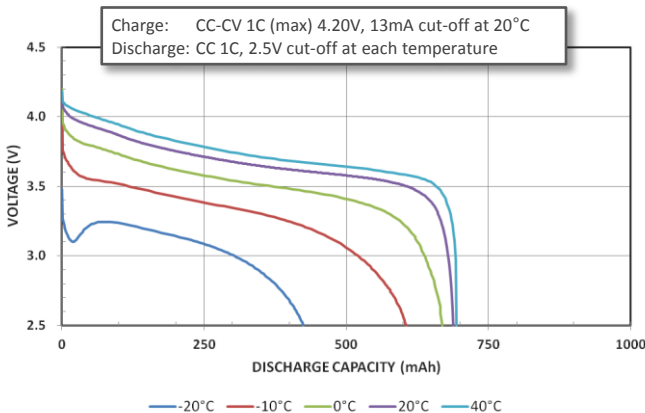

Discharge Characteristics (by rate of discharge)

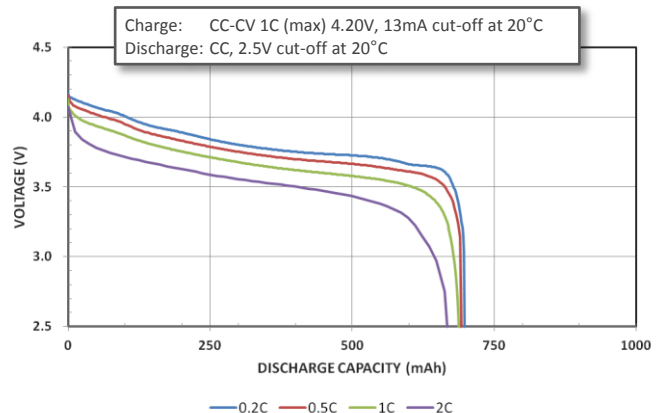

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

For more information on how Panasonic can assist you with your battery power solution needs, visit us at www.panasonic.com/industrial/batteries-oem or e-mail secsales@us.panasonic.com.